

Rear Wing For C-HR ZYX11/NGX10/NGX50 2019.10
- G / GT / S "GR SPORT" / ST "GR SPORT" Grade

Components

Rear wing (upper) Rear wing (lower) Fixing stay Lens (semi-transparent) Smoke cover Double-sided tape (thickness 1.2mm width 10mm length 1400mm) Sponge tape (width 5mm) ROWEN Nameplate (small)	1
M3x10 screws	5
M5x35 button head bolt	6
M5 washer	6
M5 spring washer	6
M6x15 bolt	7



- Please be sure to perform a trial fitting before installing the product. Some processing may be required. We cannot accept
- returns for defects after painting or installation on the vehicle. Please note. If you drop
- this product before installation or apply excessive force when installing it, it may cause falling off, damage, accidents, or malfunctions while driving due to improper installation. Please be careful when handling. If
- you install or handle the product in a manner that does not follow the instructions in this manual, it may not only cause defects to the vehicle itself, but also falling off, damage, accidents, or malfunctions while driving, so please do not do so.

To the installer

Please read this manual before installation and install the product correctly. If you have any questions, please contact the store where you purchased the product and make sure you fully understand the contents before using the product. After installation, please be sure to give this manual to the customer.

Installation Instructions

Pre-painting work


Before starting work, protect the body with masking tape to prevent accidental scratches. Refer to the maintenance manual and remove the rear gate panel, tail lamp garnish (gate side upper part), and rear gate interior. Assemble the product on the vehicle.

*If any variations are found, adjust as necessary using sandpaper or other tools.

Installation after painting


- ÿ Please refer to the diagram and secure the cover using the included screws and caulking (sold separately).
- ÿ Apply double-sided tape/foam tape to the back of the rear wing (lower).
- ÿ Secure the rear wing (lower) to the rear gate panel that was removed prior to painting using the 7 bolts and included brackets.

- ÿ Apply double-sided tape/foam tape to the back of the rear wing (lower).
- ÿ Secure the rear wing (lower) to the rear gate panel that was removed prior to painting using the 7 bolts and included brackets.

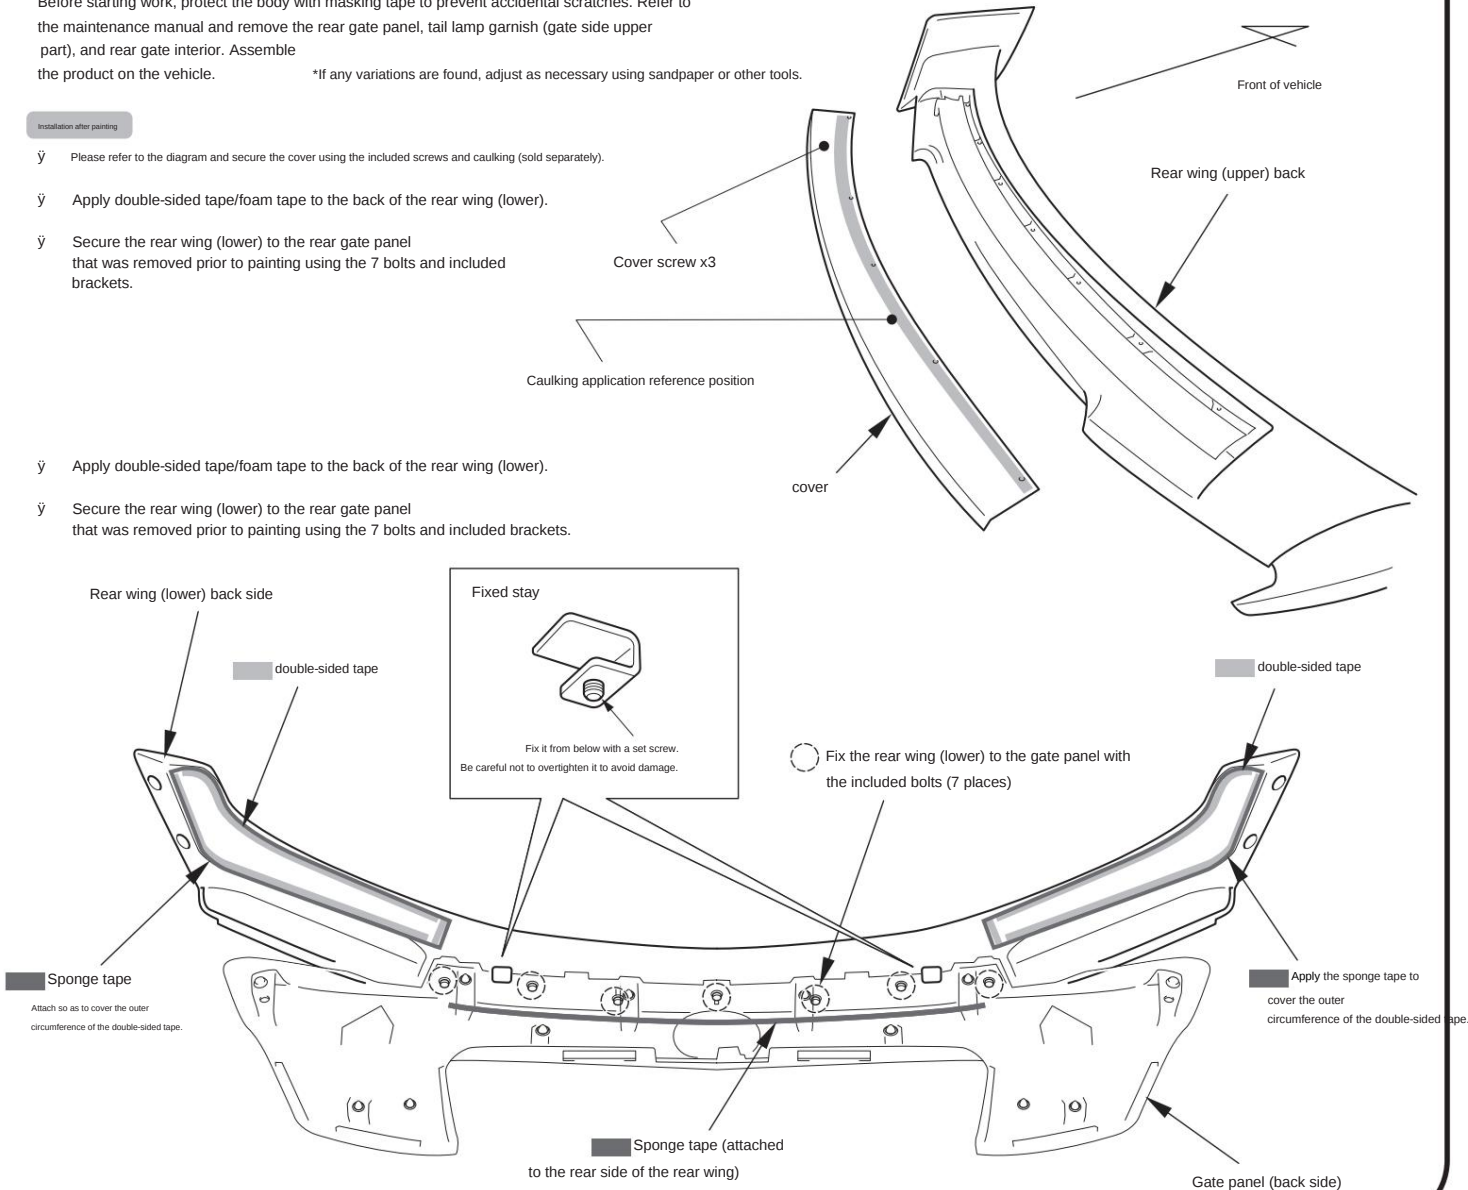


γ Fix the rear wing and gate panel that you combined in step γ to the vehicle. When doing this, remove the release paper from the double-sided tape and check the fixing position while working.

Be sure to degrease the application surface. If the temperature is low, use a hair dryer or similar to warm the surface before application. Do not remove the release paper from the double-sided tape, but fold it and assemble it temporarily to the vehicle, adjust and check the overall balance, then remove the release paper and press it down. Leave it for 24 hours after application and refrain from washing the car.

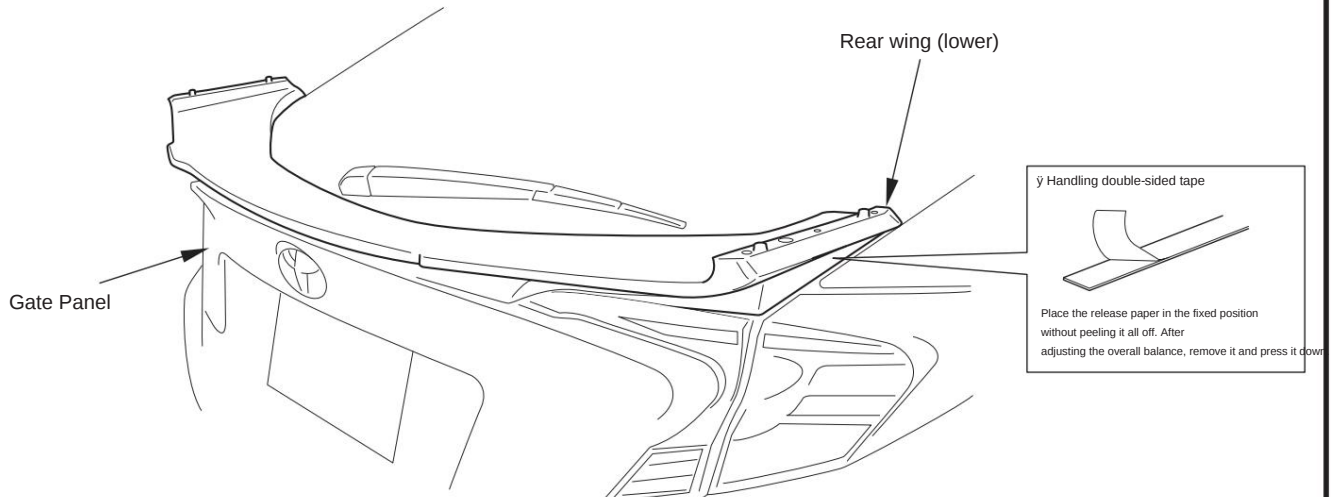


γ Secure the rear wing (upper) and rear wing (lower).

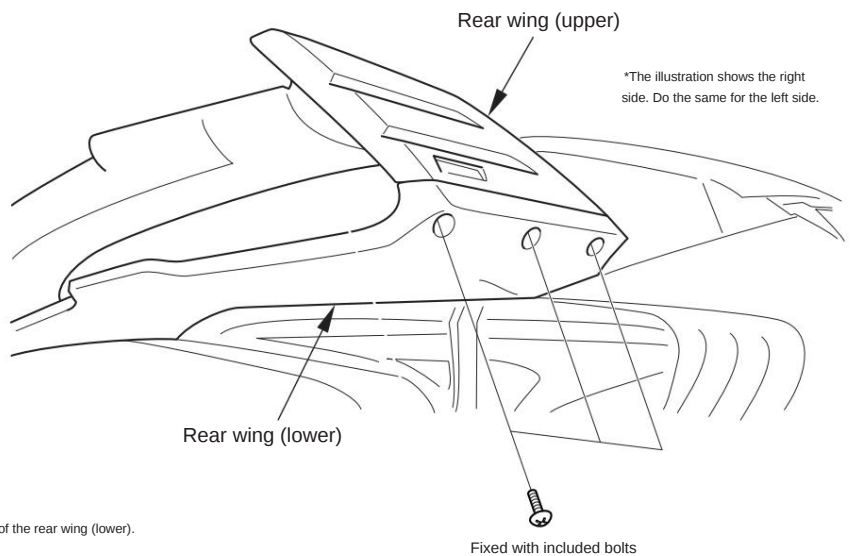

γ Rear Wing Under Fin (Op) Attach double-sided tape to the backside.

- ⑪ Attach the rear wing under fin (Op) to the mounting hole location on the back of the rear wing (lower).
- ⑫ After installation, please check the installation condition again after driving 100km to 200km.

γOptions / Installation of rear wing under fin

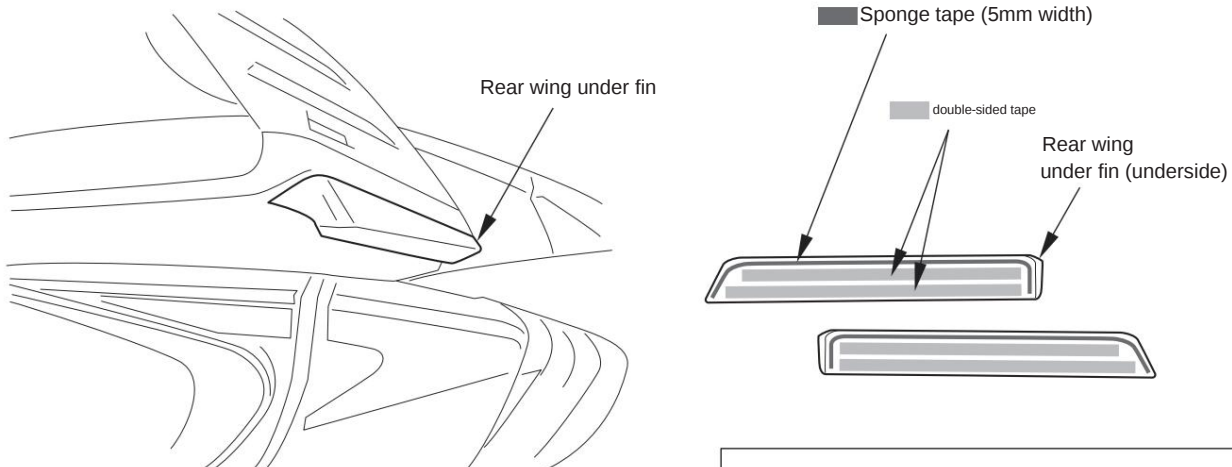

*The illustration shows the right side. Do the same for the left side.